




Characteristics	Standards	Value
<b>FLOOR PROPERTIES</b>		
Total Thickness	EN ISO 24346	6.0 mm
Acoustic Solution	EN ISO 24346	1.5mm IXPE Silent Armor Backing
Wear Layer	EN ISO 24340	0.5 mm
Finish		UV COATING
Surface		Herringbone EIR + Bevelled Edge
Installation Method		Uniclic Locking
Usage Class	EN 10874 / EN 16511	23/34
Planks Size (L x W)		750 x 125mm
<b>PACKAGING INFORMATION</b>		
Pallet Size (L*W*H)		1080*1560*720
PCS/Package		22
Weight/Package		19.7 kg
Packages/Pallet		64
m <sup>2</sup> /Package		2.06
m <sup>2</sup> /Pallet		131.8
m <sup>2</sup> /Container		2504
Pallet/Container		19
Packages/Container		1216
Total Weight/Pallet		1250 KG
<b>BEHAVIOR TO HEAT</b>		
Reaction to Fire (CE)	EN 13501-1	Bfl-S1
Thermal Conductivity	EN 12667	0.030 W/(m·K)
Thermal Resistance	EN 12667	0.053 (m <sup>2</sup> ·K)/W
Curling after Exposure	EN ISO 23999	<=  0.5  mm
Underfloor Heating		Suitable, max 27°C
<b>TECHNICAL FEATURES</b>		
Static Electrical Propensity (CE)	EN 14041	0.5kV, Pass
Slip Resistance (CE)	EN 13893	DS
Slip Resistance (Ramp Test)	DIN 51130	R9
Abrasion Resistance	EN 15468, Anhang A	> 7300 rev. (>= 7000 for Class 34)
Locking Strength	ISO 24334	Long: 4.5 kN/m, Short: 5.5 kN/m
Castor Chair Resistance	ISO 4918	Pass (Type W, > 25000)
Effect of Furniture Leg	EN ISO 16581	Pass
Microscratch Resistance	DIN EN 16094	MSR-A2
Residual Indentation	EN ISO 24343-1	0.04 mm
Dimensional Stability	EN ISO 23999	<= 0.05%
Impact Sound Improvement	EN ISO 717-2	Delta Lw = 20 dB
Resistance to Stain	EN 438-2	Gr.1: 5, Gr.2: 5, Gr.3: 4/5
Impact Resistance	EN 13329	> 1800mm
<b>TOXIC SUBSTANCES</b>		
Formaldehyde/VOC	EN 16516	E1 / VOC Free
Phthalate Free		Yes
Greenguard		Pass

Stand: 2026-01-26

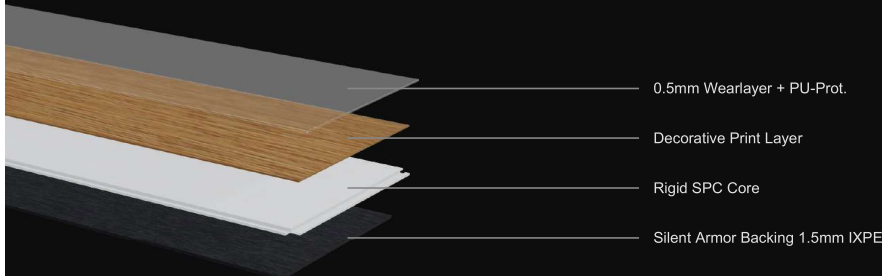

PREMIUM PRODUCT DESIGN.  
MADE IN GERMANY

